


## 模组型号及相关参数选型表

TLS08-□1-L□□□-□-□-□-□

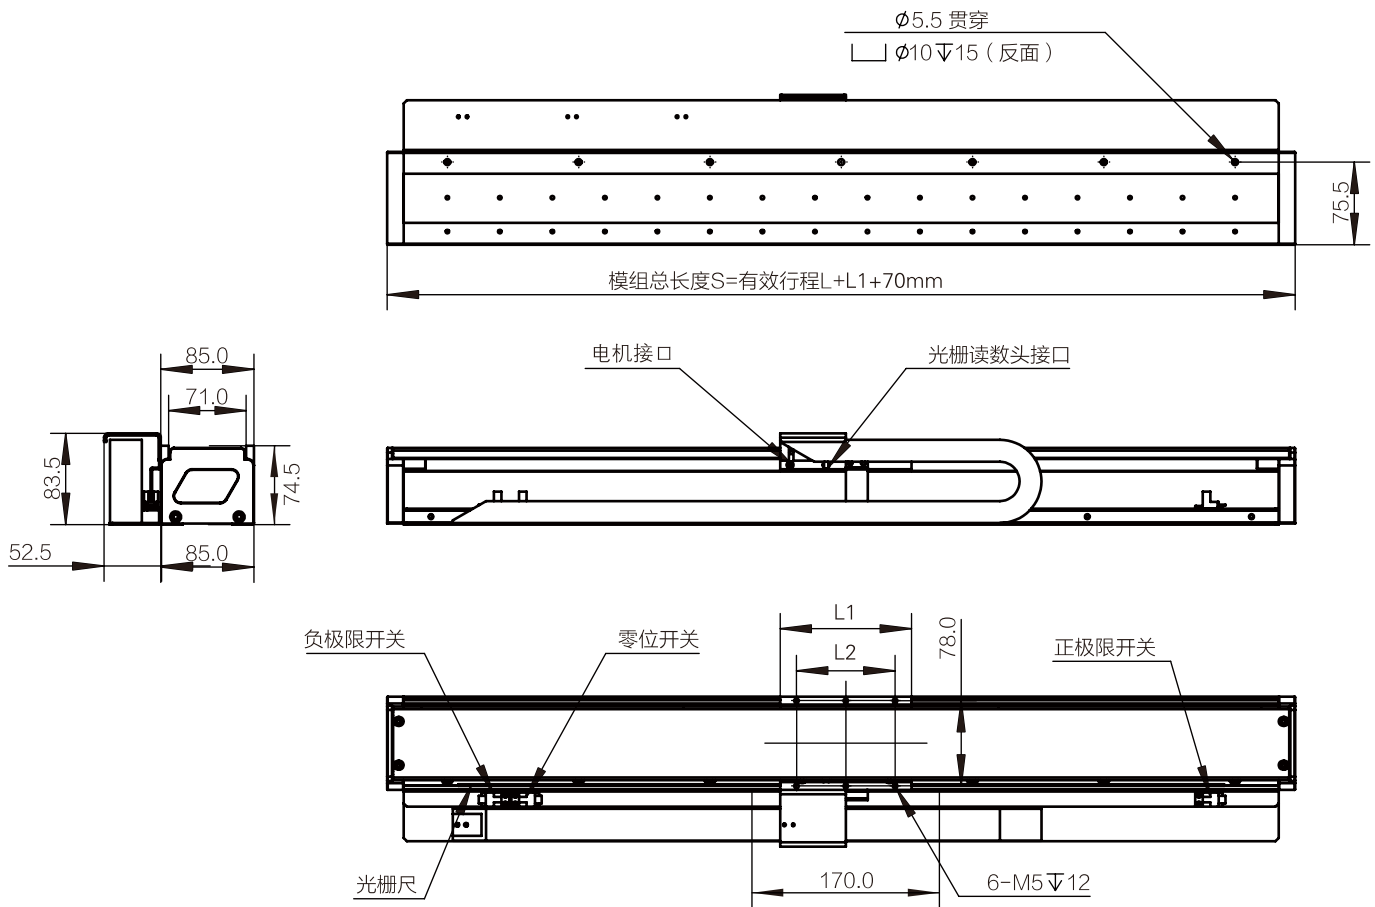

### 不同电机类型对应的相关参数介绍

电机类型	长度 (mm)	L1	L2
A1		170	90
B1		186	154
C1		268	238

# 模组型号及相关参数选型表

TLS08-□1-L □ □ □ - □ - □ - □ - □

行程 m m 项目	A1	98	146	194	242	290	338	386	434	482	530	578	626	674	722	770	818	866
	B1	82	130	178	226	274	322	370	418	466	514	562	610	658	706	754		
	C1	96	144	192	240	288	336	384	432	480	528	576	624	672				
持续 推力 (N)	A1	36																
	B1	68																
	C1	100																
峰值 推力 (N)	A1	120																
	B1	240																
	C1	360																
最大 负载 (kg)	A1	4																
	B1	8																
	C1	12																
全长 (mm)	A1	338	386	434	482	530	578	626	674	722	770	818	866	914	962	1010	1058	1106
	B1	338	386	434	482	530	578	626	674	722	770	818	866	914	962	1010		
	C1	434	482	530	578	626	674	722	770	818	866	914	962	1010				
模组 重量 (kg)	A1	4.8	5.3	5.8	6.3	6.7	7.2	7.7	8.2	8.7	9.1	9.6	10.1	10.6	11	11.5	12.0	12.5
	B1	5.5	6	6.6	7.1	7.6	8.2	8.7	9.2	9.8	10.3	10.8	11.4	11.9	12.4	12.9		
	C1	6.2	6.7	7.3	7.8	8.3	8.9	9.4	9.9	10.5	11	11.5	12.1	12.6				
运动 体总 质量 (kg)	A1	1.4																
	B1	1.8																
	C1	2.5																
定制 模组 最大 行程 (mm)	A1	1202																
	B1	1234																
	C1	1152																