


## 模组型号及相关参数选型表

TLS14-□1-L□□□-□-□-□-□

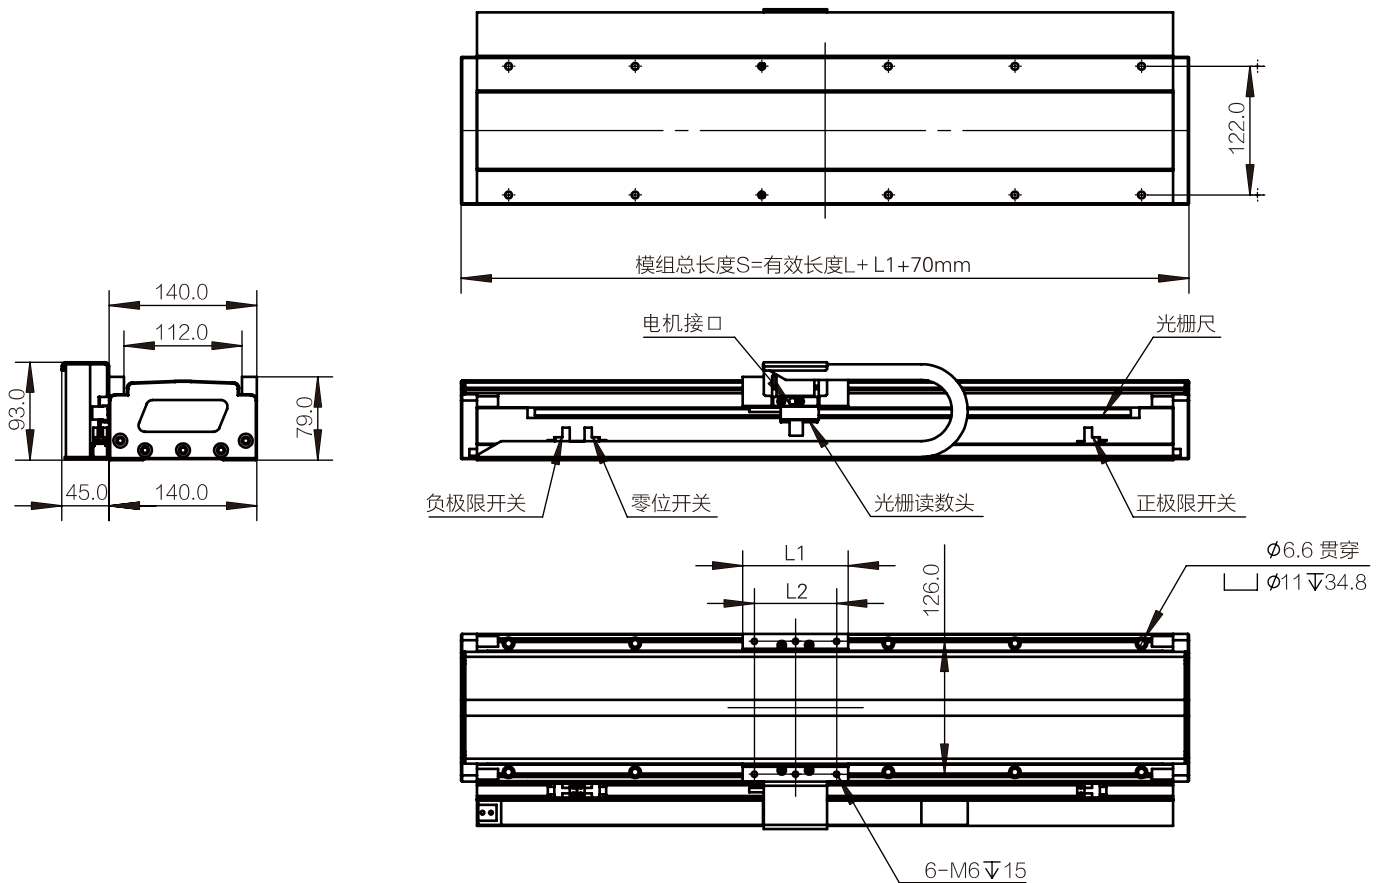

### 不同电机类型对应的相关参数介绍

电机类型 \ 长度 (mm)	L1	L2
A2	100	78
B2	186	154
C2	268	238

# 模组型号及相关参数选型表

TLS14-□1-L □ □ □ - □ - □ - □ - □

行程 m m 项目	A2	72	120	168	216	264	312	360	408	456	504	552	600	648	696	744	792	840
	B2	82	130	178	226	274	322	370	418	466	514	562	610	658	706	754		
	C2	96	144	192	240	288	336	384	432	480	528	576	624	672				
持续 推力 (N)	A2	81																
	B2	152																
	C2	218																
峰值 推力 (N)	A2	265																
	B2	534																
	C2	791																
最大 负载 (kg)	A2	20																
	B2	30																
	C2	40																
全长 (mm)	A2	242	290	338	386	434	482	530	578	626	674	722	770	818	866	914	962	1010
	B2	338	386	434	482	530	578	626	674	722	770	818	866	914	962	1010		
	C2	434	482	530	578	626	674	722	770	818	866	914	962	1010				
模组 重量 (kg)	A2	5.7	6.5	7.2	7.9	8.7	9.4	10.1	10.9	11.6	12.3	13	13.8	14.5	15.3	16	16.7	17.5
	B2	7.5	8.3	9	9.7	10.5	11.2	11.9	12.7	13.4	14.1	14.8	15.6	16.3	17.1	17.8		
	C2	8.8	9.6	10.3	11	11.8	12.5	13.2	14	14.7	15.4	16.1	16.9	17.6				
运动 体总 质量 (kg)	A2	2																
	B2	3.8																
	C2	5																
定制 模组 最大 行程 (mm)	A2	2808																
	B2	2722																
	C2	2640																